



PRODUCT SPECIFICATION


4" CA RO Element Series

Model	Permeate flow GPD (m ³ /day)*	Average Salt Rejection (%)	Minimum Salt Rejection (%)
4040-SB20-TSA	1,600 (6.0)	98.00	97.00

Performance is based on the following test conditions: 2,000.0 ppm NaCl, 420.0 psi, 25°C, 15% recovery, pH 5.5, 30 minutes operation.

OPERATIONAL AND DESIGN DATA

Membrane Type.....	SB Cellulose Acetate Blend
Configuration.....	Spiral Wound, Fiberglass Outer Wrap
Active Membrane Area.....	80 ft ² (7.4 m ²)
Recommended Applied Pressure.....	200 - 500 psi (14 - 34 bar)
Maximum Applied Pressure.....	600 psi (41 bar)
Recommended Operating Temperature.....	50 - 90°F (10 - 32°C)
Feedwater pH Range.....	5.5 nominal, 4 - 7
Chlorine Tolerance.....	0.5 ppm nominal, 1.0 ppm max
Maximum Feed Flow.....	20 GPM (4.5m ³ /hr)
Minimum Brine Flow/Permeate Flow Ratio....	5:1
Maximum SDI (15 minutes)	5.0
Maximum Turbidity.....	1 NTU

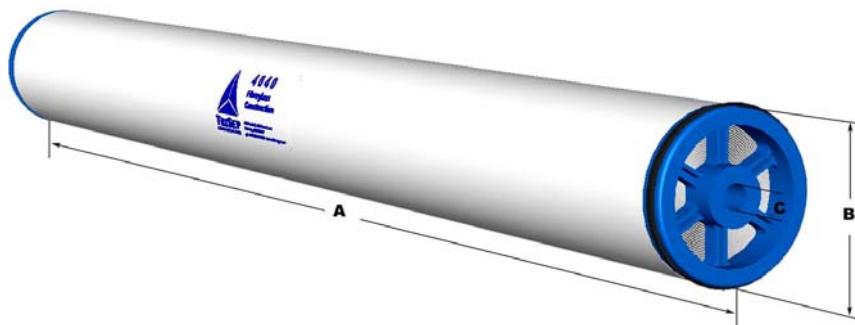

Element Weight : 15 (7)

Length (A) : 40.0 (1,016) Diameter (B) : 4.0 (101) Permeate Tube (C) : 0.75 (19.1)

Units in pounds and inches, units in parenthesis in kilograms and millimetres.

Mechanical Configuration: TriSep Style Core Tube

Feed Spacer: 0.031" thick diamond spacer

* Permeate flow is clean water flux at standard conditions above. Not applicable for all feedwater conditions. Individual element's permeate flow may vary +/- 15%.



**Engineered Membrane
SOLUTIONS**